



The most efficient modular inverter to prevent unnecessary watt loss!

Telecom

Datacom

Mass transport

Industry

Power Utilities

Renewable

DC In
48 Vdc


AC Out
230 Vac

Power
3 kVA
2.4 kW

up to 2.7
MVA

Description

BRAVO is a compact and scalable **modular inverter** providing a pure sine wave AC supply. In conjunction with a DC Power system, it provides an excellent **AC backup solution**. It uses the latest inverter technology, providing superior **energy efficiency** in a **compact size**.

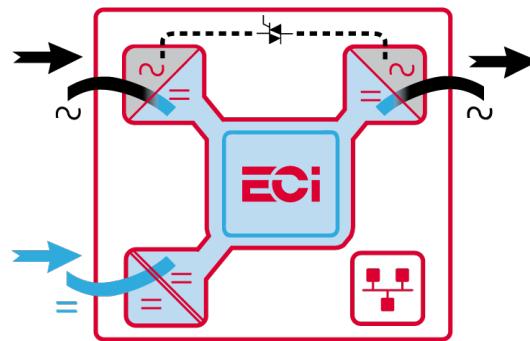

The ECI technology **eliminates all single points of failure** with full scalability; up to 32 modules in parallel and high efficiency of above **93.5% in DC/AC conversion**, hence reducing operating costs. We can build the systems up to **2.7 MVA**.

Applications

All business critical applications and all types of AC loads. The design is modular and scalable with hot-swappable inverter modules which ensures **low Mean Time to Repair (MTTR)**, reduction in service costs and meets the changing needs for future expansion.

Main Features


- Pure sine wave (double conversion)
- Up to 2.7 MVA
- Compact design
- Easy maintenance (hot swap)
- No disturbances on DC loads & batteries

Illustrations are non-binding and may include customized fittings.

Bravo ECI 48/230 (No AC in)

General	
Part number	T521730311
EMC	EN 61000-4-2 / EN 61000-4-3 / EN 61000-4-4 / EN 61000-4-5 / EN 61000-4-6 / EN 61000-4-8 ETSI EN 300386 v1.9.1
Safety	EN62040-1
Cooling	Forced
MTBF	240 000 hrs (MIL-2171F)
Efficiency	>93.5%
Dielectric strength DC/AC	4300 Vdc
RoHS	Compliant
Operating T° / Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-3 Class 3.1 -20°C to 65°C, power de-rating from 40°C to 65°C / Max RH 95% for 96 hours per year
Storage T° / Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-1 Class 1.2 -40°C to 70°C / Max RH 95% for 96 hours per year
Public transport T°/Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-2 Class 3.1 -40°C to 70°C / Max RH 95% for 96 hours per year
Material (casing)	Zinc coated steel
Power	
AC Output Power	
Nominal Output power (VA) / (W)	3000 VA / 2400 W
Short time overload capacity	125% (15 seconds)
Admissible load power factor	Full power rating from 0 inductive to 0 capacitive
DC Input Specifications	
DC voltage: Nominal / range	48 VDC / (40-60V)*
Nominal current (at 48 Vdc and 2400 W output)	53.2 A
Maximum input current (for 15 second) / voltage ripple	66.5 A / < 10 mV RMS
AC Output Specifications	
Nominal voltage (AC)	Adjustable: 220 VAC - 240 VAC
Frequency / frequency accuracy	50 or 60 Hz / 0.03%
Total harmonic distortion (resistive load)	< 3%
Load impact recovery time (10% - 90%)	≤ 0.4 ms
Nominal current	13 A @ 230 Vac
Crest factor at nominal power	3 : 1 for load P.F. ≤0.7
Short circuit clear up capacity 0-20 ms	100 A for 20 ms - Available while Mains is available at AC input port / 34A RMS in DC/AC
Short circuit current after >20 ms -15 s	18 A RMS
AC output voltage stability	±1% from 10% to 100% load
In Transfer Performance	
Max. voltage interruption / total transient voltage duration (max)	0 s / 0 s
Signaling & Supervision	
Display	Synoptic LED
Alarms output / Supervision	Dry contacts on shelf / Use optional devices
Remote on / off	On rear terminal of the shelf via T2S ETH

* Permanent 2400W / derating apply based on internal heatsink T°.

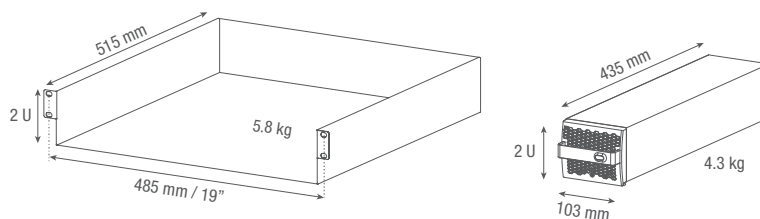

Bravo ECI 48/230 - No AC in - Datasheet v1.0 Specifications can change without notice. New data will be updated on our website: www.cet-power.com. The present equipment is protected by several international patents, trademarks and copyrights.